



Internal Combustion Engine Counterbalance Trucks

H35 – H50

Capacity 3.5 t – 5.0 t | Series 1204

DIESEL **LPG** **CNG** **HVO**

Robust all-rounder

- Hydrostatic drive, twin pedal control and Linde Load Control for efficient load handling
- Robust design and maintenance-free components guarantee high availability and low operating costs
- Asymmetric slim mast profiles, narrow A-pillars, lowered front plate and large roof panel for excellent visibility
- Wireless data transmission for smooth integration into other software systems, e.g. for fleet management
- The truck's low centre of gravity and intelligent assistance systems reduce the risk of tipping and accidents

TECHNICAL DATA (according to VDI 2198)

			Linde MH	Linde MH	Linde MH	Linde MH	Linde MH		
			H35/600 D	H40/600 D	H45/600 D	H50/500 D	H50/600 D		
Characteristics	1.1	Manufacturer	Linde MH	Linde MH	Linde MH	Linde MH	Linde MH		
	1.2	Manufacturer's type designation	H35/600 D	H40/600 D	H45/600 D	H50/500 D	H50/600 D		
	1.2a	Series	1204-01	1204-01	1204-01	1204-01	1204-01		
	1.3	Drive	Diesel	Diesel	Diesel	Diesel	Diesel		
	1.4	Operation	Seat	Seat	Seat	Seat	Seat		
	1.5	Rated capacity/rated load	Q (t)	3.5	4.0	4.5	4.999	4.999	
	1.6	Load centre distance	c (mm)	600	600	600	500	600	
	1.8	Load distance, centre of drive axle to fork	x (mm)	500	510	535	535	535	
	1.9	Wheelbase	y (mm)	2030	2030	2070	2070	2110	
Weight	2.1	Service weight	kg	5722	6188	6706	6682	7087	
	2.2	Axle loading, laden front/rear	kg	8167/1055	9021/1167	9973/1233	10464/1217	10768/1318	
	2.3	Axle loading, unladen front/rear	kg	2770/2952	2833/3355	3005/3701	2965/3717	3079/4008	
Tyres/chassis	3.1	Tyres: solid rubber, superelastic, pneumatic, polyurethane	SE	SE	SE	SE	SE		
	3.2	Tyre size, front	250/70-15 (250-15)	250/70-15 (250-15)	315/70-15 (300-15)	315/70-15 (300-15)	315/70-15 (300-15)		
	3.3	Tyre size, rear	250/70-15 (250-15)	250/70-15 (250-15)	250/70-15 (250-15)	250/70-15 (250-15)	250/70-15 (250-15)		
	3.5	Wheels, number front/rear (x = driven wheels)	2x/2	2x/2	2x/2	2x/2	2x/2		
	3.6	Tread, front	b10 (mm)	1221	1221	1190	1190	1190	
	3.7	Tread, rear	b11 (mm)	1123	1123	1123	1123	1123	
	Dimensions	4.1	Mast/fork carriage tilt, forward/backwards	α/β (°)	5.0/8.0 ¹⁾	5.0/8.0 ¹⁾	5.0/8.0 ¹⁾	5.0/8.0 ¹⁾	5.0/8.0 ¹⁾
4.2		Mast height, lowered	h1 (mm)	2425 ²⁾	2425 ²⁾	2474 ²⁾	2474 ²⁾	2474 ²⁾	
4.3		Free lift	h2 (mm)	150	150	150	150	150	
4.4		Lift	h3 (mm)	3100	3100	3100	2900	2900	
4.5		Mast height, extended	h4 (mm)	4023	4023	4023	3923	3923	
4.7		Height of overhead guard (cabin)	h6 (mm)	2414 ³⁾	2414 ³⁾	2456	2456	2455	
4.8		Seat height relative to SIP/stand height	h7 (mm)	1298	1298	1341	1341	1341	
4.12		Coupling height	h10 (mm)	661	660	675	675	674	
4.19		Overall length	l1 (mm)	4251	4261	4326	4126	4366	
4.20		Length to fork face	l2 (mm)	3051	3061	3126	3126	3166	
4.21		Overall width	b1/b2 (mm)	1446/1410	1446/1410	1448/1410	1448/1410	1448/1410	
4.22		Fork dimensions DIN ISO 2331	s/e/l (mm)	50 × 120 × 1 200	60 × 130 × 1200	60 × 130 × 1200	60 × 130 × 1000	60 × 130 × 1200	
4.23		Fork carriage to ISO 2328, class/type A, B		3 A	3 A	3 A	3 A	3 A	
4.24		Fork carriage width	b3 (mm)	1350	1350	1350	1350	1350	
4.31		Ground clearance, laden, below mast	m1 (mm)	158	156	203	202	202	
4.32		Ground clearance, centre of wheelbase	m2 (mm)	207	207	250	250	250	
4.34.1		Aisle width for pallets 1000 × 1200 crossways	Ast (mm)	4443 ⁴⁾	4453 ⁴⁾	4520 ⁴⁾	4520 ⁴⁾	4563 ⁴⁾	
4.34.2		Aisle width with pallet 800 × 1200 lengthways	Ast (mm)	4643 ⁴⁾	4653 ⁴⁾	4720 ⁴⁾	4720 ⁴⁾	4763 ⁴⁾	
4.35		Turning radius	Wa (mm)	2743	2743	2785	2785	2828	
4.36		Inside turning radius	b13 (mm)	808	808	823	823	838	
Performance	5.1	Travel speed, laden/unladen	km/h	21/21	21/21	24/24	24/24	24/24	
	5.1.1	Travel speed, laden/unladen, backwards	km/h	21/21	21/21	24/24	24/24	24/24	
	5.2	Lifting speed, laden/unladen	m/s	0.53/0.57	0.53/0.57	0.53/0.57	0.5/0.53	0.5/0.53	
	5.3	Lowering speed, laden/unladen	m/s	0.56/0.53	0.56/0.53	0.56/0.53	0.54/0.51	0.54/0.51	
	5.5	Drawbar pull, laden/unladen	N	29171/21735	28972/22413	25072/23786	24951/23753	24903/24209	
	5.7	Gradeability, laden/unladen	%	34.1/29.8	30.2/28.2	23.4/27.5	22.2/27.5	21.5/26.7	
	5.9	Acceleration time, laden/unladen	s	5.4/4.9	5.5/4.9	5.6/5.0	5.7/5.0	5.8/5.1	
	5.10	Service brake		hydrostatic	hydrostatic	hydrostatic	hydrostatic	hydrostatic	
	Combustion-engine	7.1	Engine manufacturer/type		Hyundai D24	Hyundai D24	Hyundai D24	Hyundai D24	Hyundai D24
		7.2	Engine power according to ISO 1585	kW	55	55	55	55	55
7.3		Rated speed	1/min	2300	2300	2300	2300	2300	
7.4		Number of cylinders/displacement	-/cm ³	4/2393	4/2393	4/2393	4/2393	4/2393	
7.5		Fuel consumption according to DIN EN 16796	l/h	3.7	3.8	4	4.2	4.3	
7.5a		Fuel consumption according to DIN EN 16796	kg/h	-	-	-	-	-	
7.5.1		CO2 equivalent according to DIN EN 16796	kg/h	11.8	12.1	12.7	13.3	13.7	
7.6		Turnover output according to VDI 2198	t/h	291.0	334.0	373.0	399.0	387.0	
7.7		Turnover efficiency according to VDI 2198	t/l	48.5	54.8	59.2	60.5	58.6	
7.7a		Turnover efficiency according to VDI 2198	t/kg	-	-	-	-	-	
7.8		Generator	A	110.0	110.0	110.0	110.0	110.0	
7.9	Vehicle electrical system voltage	V	12	12	12	12	12		
7.10	Battery voltage/nominal capacity	(V)/(Ah) o. kWh	12V / 110AH	12V / 110AH	12V / 110AH	12V / 110AH	12V / 110AH		
Drive	8.1	Type of drive unit		hydrost. /stepl.	hydrost. /stepl.	hydrost. /stepl.	hydrost. /stepl.	hydrost. /stepl.	
	10.1	Operating pressure for attachments	bar	170	170	170	170	170	
Additional Data	10.2	Oil flow for attachments	l/min	55	55	55	55	55	
	10.4	Fuel tank, capacity	l	76	76	76	76	76	
	10.7	Sound pressure level LpAZ (at the operator's seat)	dB (A)	79	79	79	79	79	
	10.8	Towing Coupling, design/type, DIN	similar DIN 15170-H	similar DIN 15170-H	similar DIN 15170-H	similar DIN 15170-H	similar DIN 15170-H	similar DIN 15170-H	
	11.2	Static stability		1.56	1.53	1.5	1.49	1.49	

1) Lift height and equipment can alter rear mast tilt angle
2) With 150 mm free lift on standard mast

3) +2 mm with KCU
4) Including a 200 mm (min.) operating aisle clearance

5) +10 mm with KCU
6) CNG H - Gas = GR; CNG L - Gas = G25

TECHNICAL DATA (according to VDI 2198)

			Linde MH	Linde MH	Linde MH	Linde MH	Linde MH	
	1.1	Manufacturer						
Characteristics	1.2	Manufacturer's type designation	H35/600 T	H40/600 T	H45/600 T	H50/500 T	H50/600 T	
	1.2a	Series	1204-01	1204-01	1204-01	1204-01	1204-01	
	1.3	Drive	LPG	LPG	LPG	LPG	LPG	
	1.4	Operation	Seat	Seat	Seat	Seat	Seat	
	1.5	Rated capacity/rated load	Q (t)	3.5	4.0	4.5	4.999	4.999
	1.6	Load centre distance	c (mm)	600	600	600	500	600
	1.8	Load distance, centre of drive axle to fork	x (mm)	500	510	535	535	535
	1.9	Wheelbase	y (mm)	2030	2030	2070	2070	2110
	Weight	2.1	Service weight	kg	5843	6309	6827	6803
2.2		Axle loading, laden front/rear	kg	8161/1182	9015/1294	9969/1358	10460/1342	10766/1441
2.3		Axle loading, unladen front/rear	kg	2764/3079	2827/3482	3001/3826	2961/3842	3077/4131
Tyres/chassis	3.1	Tyres: solid rubber, superelastic, pneumatic, polyurethane	SE	SE	SE	SE	SE	
	3.2	Tyre size, front	250/70-15 (250-15)	250/70-15 (250-15)	315/70-15 (300-15)	315/70-15 (300-15)	315/70-15 (300-15)	
	3.3	Tyre size, rear	250/70-15 (250-15)	250/70-15 (250-15)	250/70-15 (250-15)	250/70-15 (250-15)	250/70-15 (250-15)	
	3.5	Wheels, number front/rear (x = driven wheels)	2x/2	2x/2	2x/2	2x/2	2x/2	
	3.6	Tread, front	b10 (mm)	1221	1221	1190	1190	1190
	3.7	Tread, rear	b11 (mm)	1123	1123	1123	1123	1123
	Dimensions	4.1	Mast/fork carriage tilt, forward/backwards	α/β (°)	5.0/8.0 ¹⁾	5.0/8.0 ¹⁾	5.0/8.0 ¹⁾	5.0/8.0 ¹⁾
4.2		Mast height, lowered	h1 (mm)	2425 ²⁾	2425 ²⁾	2474 ²⁾	2474 ²⁾	2474 ²⁾
4.3		Free lift	h2 (mm)	150	150	150	150	150
4.4		Lift	h3 (mm)	3100	3100	3100	2900	2900
4.5		Mast height, extended	h4 (mm)	4023	4023	4023	3923	3923
4.7		Height of overhead guard (cabin)	h6 (mm)	2414 ³⁾	2414 ³⁾	2456	2456	2456
4.8		Seat height relative to SIP/stand height	h7 (mm)	1298	1298	1341	1341	1341
4.12		Coupling height	h10 (mm)	661	660	675	675	674
4.19		Overall length	l1 (mm)	4251	4261	4326	4126	4366
4.20		Length to fork face	l2 (mm)	3051	3061	3126	3126	3166
4.21		Overall width	b1/b2 (mm)	1446/1410	1446/1410	1448/1410	1448/1410	1448/1410
4.22		Fork dimensions DIN ISO 2331	s/e/l (mm)	50 × 120 × 1200	60 × 130 × 1200	60 × 130 × 1200	60 × 130 × 1000	60 × 130 × 1200
4.23		Fork carriage to ISO 2328, class/type A, B		3 A	3 A	3 A	3 A	3 A
4.24		Fork carriage width	b3 (mm)	1350	1350	1350	1350	1350
4.31		Ground clearance, laden, below mast	m1 (mm)	158	156	203	202	202
4.32		Ground clearance, centre of wheelbase	m2 (mm)	207	207	250	250	250
4.34.1		Aisle width for pallets 1000 × 1200 crossways	Ast (mm)	4443 ⁴⁾	4453 ⁴⁾	4520 ⁴⁾	4520 ⁴⁾	4563 ⁴⁾
4.34.2		Aisle width with pallet 800 × 1200 lengthways	Ast (mm)	4643 ⁴⁾	4653 ⁴⁾	4720 ⁴⁾	4720 ⁴⁾	4763 ⁴⁾
4.35		Turning radius	Wa (mm)	2743	2743	2785	2785	2828
4.36		Inside turning radius	b13 (mm)	808	808	823	823	838
Performance	5.1	Travel speed, laden/unladen	km/h	21/21	21/21	24/24	24/24	24/24
	5.1.1	Travel speed, laden/unladen, backwards	km/h	21/21	21/21	24/24	24/24	24/24
	5.2	Lifting speed, laden/unladen	m/s	0.53/0.57	0.53/0.57	0.53/0.57	0.5/0.53	0.5/0.53
	5.3	Lowering speed, laden/unladen	m/s	0.56/0.53	0.56/0.53	0.56/0.53	0.54/0.51	0.54/0.51
	5.5	Drawbar pull, laden/unladen	N	29147/21735	28948/22361	25049/23753	24951/23753	24880/24195
	5.7	Gradeability, laden/unladen	%	33.6/29.0	29.8/27.5	23.1/26.9	22.0/26.9	21.3/26.2
	5.9	Acceleration time, laden/unladen	s	5.1/4.6	5.3/4.7	5.5/4.9	5.6/4.9	5.7/5.0
	5.10	Service brake		hydrostatic	hydrostatic	hydrostatic	hydrostatic	hydrostatic
	Combustion-engine	7.1	Engine manufacturer/type	Hyundai P34	Hyundai P34	Hyundai P34	Hyundai P34	Hyundai P34
		7.2	Engine power according to ISO 1585	kW	55	55	55	55
7.3		Rated speed	1/min	2300	2300	2300	2300	2300
7.4		Number of cylinders/displacement	-/cm ³	4/3409	4/3409	4/3409	4/3409	4/3409
7.5		Fuel consumption according to DIN EN 16796	l/h	-	-	-	-	-
7.5a		Fuel consumption according to DIN EN 16796	kg/h	3.7	3.8	3.9	4.1	4.2
7.5.1		CO2 equivalent according to DIN EN 16796	kg/h	12.5	12.9	13.2	13.9	14.2
7.6		Turnover output according to VDI 2198	t/h	285.0	330.0	369.0	395.0	383.0
7.7		Turnover efficiency according to VDI 2198	t/l	-	-	-	-	-
7.7a		Turnover efficiency according to VDI 2198	t/kg	47.5	54.1	59.5	61.7	59.8
7.8		Generator	A	110.0	110.0	110.0	110.0	110.0
7.9	Vehicle electrical system voltage	V	12	12	12	12	12	
7.10	Battery voltage/nominal capacity	(V)/(Ah) o. kWh	12V / 110AH	12V / 110AH	12V / 110AH	12V / 110AH	12V / 110AH	
Drive	8.1	Type of drive unit	hydrost. /stepl.	hydrost. /stepl.	hydrost. /stepl.	hydrost. /stepl.	hydrost. /stepl.	
	Additional data	10.1	Operating pressure for attachments	bar	170	170	170	170
10.2		Oil flow for attachments	l/min	55	55	55	55	55
10.4		Fuel tank, capacity	l	70	70	70	70	70
10.7		Sound pressure level LpAZ (at the operator's seat)	dB (A)	78	78	78	78	78
10.8		Towing Coupling, design/type, DIN	similar DIN 15170-H	similar DIN 15170-H	similar DIN 15170-H	similar DIN 15170-H	similar DIN 15170-H	similar DIN 15170-H
11.2		Static stability		1.62	1.59	1.55	1.54	1.54

1) Lift height and equipment can alter rear mast tilt angle
2) With 150 mm free lift on standard mast

3) +2 mm with KCU
4) Including a 200 mm (min.) operating aisle clearance

5) +10 mm with KCU
6) CNG H - Gas = GR; CNG L - Gas = G25



TECHNICAL DATA (according to VDI 2198)

Characteristics	1.1	Manufacturer	Linde MH	Linde MH	Linde MH	
	1.2	Manufacturer's type designation	H50/600 D-Container	H50/600 D Beverage	H50/600 CNG	
Weight	1.2a	Series	1204-01	1204-01	1204-01	
	1.3	Drive	Diesel	Diesel	CNG	
Tyres/chassis	1.4	Operation	Seat	Seat	Seat	
	1.5	Rated capacity/rated load	Q (t)	4.999	4.999	4.999
Dimensions	1.6	Load centre distance	c (mm)	600	600	600
	1.8	Load distance, centre of drive axle to fork	x (mm)	510	535	535
Performance	1.9	Wheelbase	y (mm)	2110	2110	2110
	2.1	Service weight	kg	6991	7536	7266
Combustion-engine	2.2	Axle loading, laden front/rear	kg	10599/1391	11048/1487	10769/1496
	2.3	Axle loading, unladen front/rear	kg	2970/4021	3359/4177	3080/4186
Drive	3.1	Tyres: solid rubber, superelastic, pneumatic, polyurethane	SE	SE	SE	
	3.2	Tyre size, front	355/45-15 (28x12.5-15)	315/70-15 (300-15)	315/70-15 (300-15)	
Additional data	3.3	Tyre size, rear	250/70-15 (250-15)	250/70-15 (250-15)	250/70-15 (250-15)	
	3.5	Wheels, number front/rear (x = driven wheels)	2x/2	2x/2	2x/2	
Additional data	3.6	Tread, front	b10 (mm)	1190	1190	
	3.7	Tread, rear	b11 (mm)	1123	1123	
Additional data	4.1	Mast/fork carriage tilt, forward/backwards	α/β (°)	5.0/7.0 ¹⁾	5.0/8.0 ¹⁾	5.0/8.0 ¹⁾
	4.2	Mast height, lowered	h1 (mm)	2208 ²⁾	3074 ²⁾	2474 ²⁾
Additional data	4.3	Free lift	h2 (mm)	150	150	150
	4.4	Lift	h3 (mm)	2500	4100	2900
Additional data	4.5	Mast height, extended	h4 (mm)	3505	5123	3923
	4.7	Height of overhead guard (cabin)	h6 (mm)	2224 ³⁾	2855	2456
Additional data	4.8	Seat height relative to SIP/stand height	h7 (mm)	1289	1741	1341
	4.12	Coupling height	h10 (mm)	688	674	674
Additional data	4.19	Overall length	l1 (mm)	4341	4366	4366
	4.20	Length to fork face	l2 (mm)	3141	3166	3166
Additional data	4.21	Overall width	b1/b2 (mm)	1490/1410	1448/1410	1448/1410
	4.22	Fork dimensions DIN ISO 2331	s/e/l (mm)	60 × 130 × 1200	60 × 130 × 1200	60 × 130 × 1200
Additional data	4.23	Fork carriage to ISO 2328, class/type A, B		3 A	3 A	3 A
	4.24	Fork carriage width	b3 (mm)	1350	1350	1350
Additional data	4.31	Ground clearance, laden, below mast	m1 (mm)	142	202	202
	4.32	Ground clearance, centre of wheelbase	m2 (mm)	216	250	250
Additional data	4.34.1	Aisle width for pallets 1000 × 1200 crossways	Ast (mm)	4538 ⁴⁾	4563 ⁴⁾	4563 ⁴⁾
	4.34.2	Aisle width with pallet 800 × 1200 lengthways	Ast (mm)	4738 ⁴⁾	4763 ⁴⁾	4763 ⁴⁾
Additional data	4.35	Turning radius	Wa (mm)	2828	2828	2828
	4.36	Inside turning radius	b13 (mm)	838	838	838
Additional data	5.1	Travel speed, laden/unladen	km/h	20/20	24/24	24/24
	5.1.1	Travel speed, laden/unladen, backwards	km/h	20/20	24/24	24/24
Additional data	5.2	Lifting speed, laden/unladen	m/s	0.5/0.53	0.5/0.53	0.5/0.53
	5.3	Lowering speed, laden/unladen	m/s	0.54/0.51	0.54/0.51	0.54/0.51
Additional data	5.5	Drawbar pull, laden/unladen	N	29546/23360	24815/25796	24868/24216
	5.7	Gradeability, laden/unladen	%	25.9/26.6	20.6/26.7	21.1/25.9
Additional data	5.9	Acceleration time, laden/unladen	s	5.8/5.1	6.0/5.2	5.8/5.1
	5.10	Service brake		hydrostatic	hydrostatic	hydrostatic
Additional data	7.1	Engine manufacturer/type		Hyundai D24	Hyundai D24	Hyundai P34
	7.2	Engine power according to ISO 1585	kW	55	55	50 (H); 48 (L) ⁵⁾
Additional data	7.3	Rated speed	1/min	2300	2300	2300
	7.4	Number of cylinders/displacement	-/cm ³	4/2393	4/2393	4/3.409
Additional data	7.5	Fuel consumption according to DIN EN 16796	l/h	4.3	4.3	-
	7.5a	Fuel consumption according to DIN EN 16796	kg/h	-	-	5.3 (H); 5.7 (L) ⁵⁾
Additional data	7.5.1	CO2 equivalent according to DIN EN 16796	kg/h	13.7	13.7	16.6 (H); 17.8 (L) ⁵⁾
	7.6	Turnover output according to VDI 2198	t/h	387.0	378.9	374.8
Additional data	7.7	Turnover efficiency according to VDI 2198	t/l	58.6	57.4	-
	7.7a	Turnover efficiency according to VDI 2198	t/kg	-	-	58.6
Additional data	7.8	Generator	A	110.0	110.0	110.0
	7.9	Vehicle electrical system voltage	V	12	12	12
Additional data	7.10	Battery voltage/nominal capacity	(V)/(Ah) o. kWh	12V / 110AH	12V / 110AH	12V / 110AH
	8.1	Type of drive unit		hydrost. /stepl.	hydrost. /stepl.	hydrost. /stepl.
Additional data	10.1	Operating pressure for attachments	bar	170	170	170
	10.2	Oil flow for attachments	l/min	55	55	55
Additional data	10.4	Fuel tank, capacity	l	76	76	50 + 75
	10.7	Sound pressure level LpAZ (at the operator's seat)	dB (A)	79	79	78
Additional data	10.8	Towing Coupling, design/type, DIN	similar DIN 15170-H	similar DIN 15170-H	similar DIN 15170-H	similar DIN 15170-H
	11.2	Static stability		1.53	1.55	1.56

1) Lift height and equipment can alter rear mast tilt angle
2) With 150 mm free lift on standard mast

3) +2 mm with KCU
4) Including a 200 mm (min.) operating aisle clearance

5) +10 mm with KCU
6) CNG H - Gas = GR; CNG L - Gas = G25

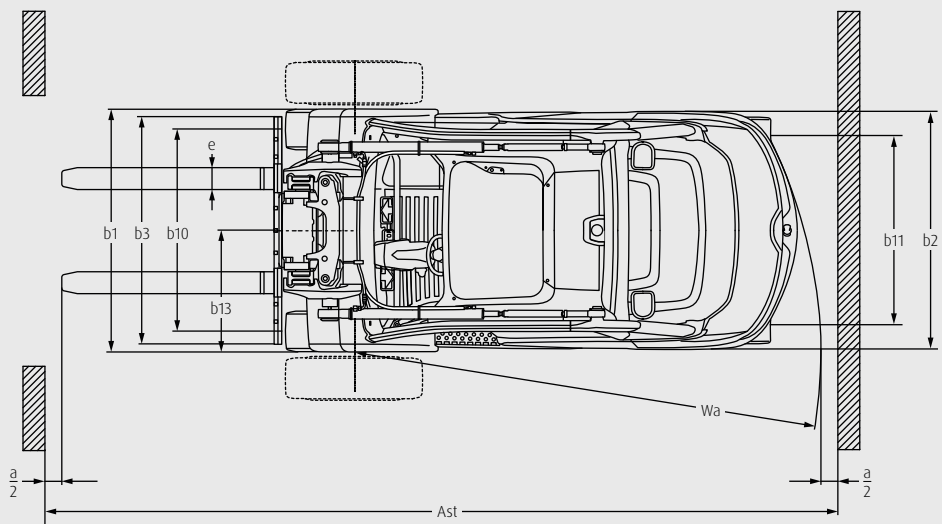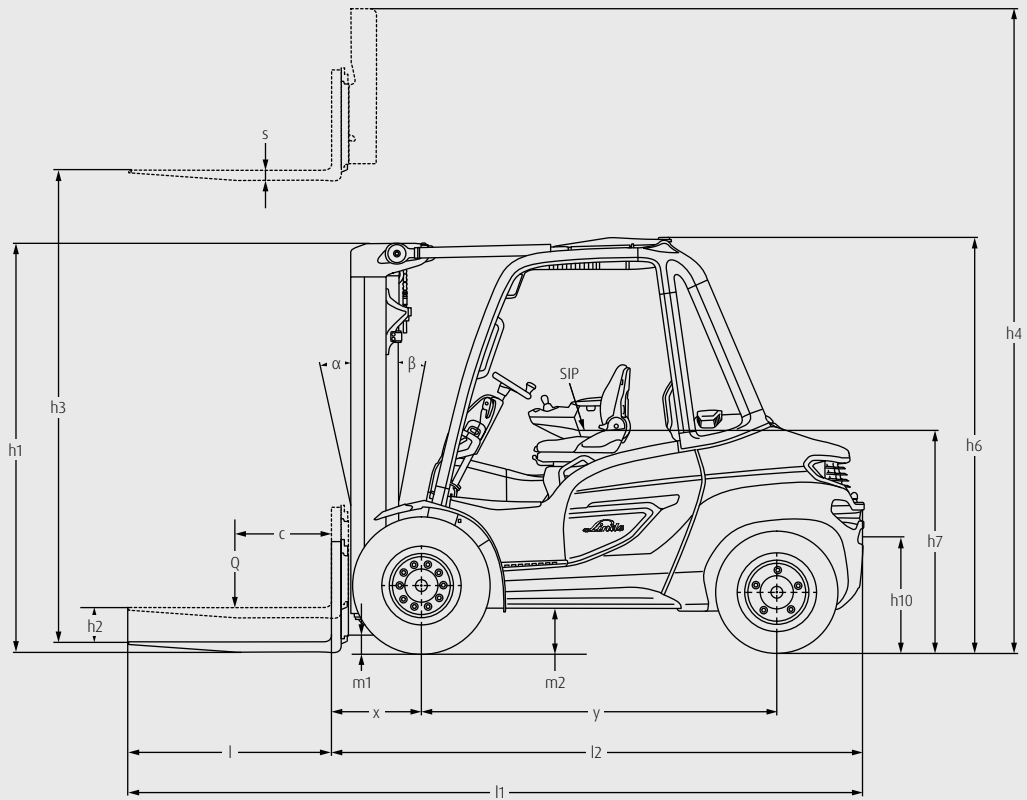

MAST TABLES

STANDARD MAST (in mm)

Series	1534													
Lift	h3: 2700 ¹⁾		h3: 3100		h3: 3200		h3: 3700		h3: 4100		h3: 4400		h3: 5000	
Height measurements	h1: 2210 h4: 3605	h2: 150	h1: 2430 h4: 4020	h2: 150	h1: 2480 h4: 4120	h2: 150	h1: 2730 h4: 4620	h2: 150	h1: 2930 h4: 5020	h2: 150	h1: 3080 h4: 5320	h2: 150	h1: 3380 h4: 5920	h2: 150
Manufacturer's type designation														
H35/600	<input type="radio"/>		<input type="radio"/>		<input type="radio"/>		<input type="radio"/>		<input type="radio"/>		<input type="radio"/>		<input type="radio"/>	
H40/600	<input type="radio"/>		<input type="radio"/>		<input type="radio"/>		<input type="radio"/>		<input type="radio"/>		<input type="radio"/>		<input type="radio"/>	

Series	1534													
Lift	h3: 2700 ¹⁾		h3: 3100		h3: 3200		h3: 3700		h3: 4100		h3: 4400		h3: 5000	
Height measurements	h1: 2210 h4: 3605	h2: 150	h1: 2480 h4: 4025	h2: 150	h1: 2530 h4: 4125	h2: 150	h1: 2780 h4: 4625	h2: 150	h1: 2980 h4: 5025	h2: 150	h1: 3130 h4: 5325	h2: 150	h1: 3430 h4: 5925	h2: 150
Manufacturer's type designation														
H45/600	<input type="radio"/>		<input type="radio"/>		<input type="radio"/>		<input type="radio"/>		<input type="radio"/>		<input type="radio"/>		<input type="radio"/>	

Series	1534													
Lift	h3: 2500 ¹⁾		h3: 2900		h3: 3200		h3: 3700		h3: 4100		h3: 4400		h3: 5000	
Height measurements	h1: 2210 h4: 3505	h2: 150	h1: 2480 h4: 3920	h2: 150	h1: 2630 h4: 4220	h2: 150	h1: 2880 h4: 4720	h2: 150	h1: 3080 h4: 5120	h2: 150	h1: 3230 h4: 5420	h2: 150	h1: 3530 h4: 6020	h2: 150
Manufacturer's type designation														
H50/500	<input type="radio"/>		<input type="radio"/>		<input type="radio"/>		<input type="radio"/>		<input type="radio"/>		<input type="radio"/>		<input type="radio"/>	
H50/600	<input type="radio"/>		<input type="radio"/>		<input type="radio"/>		<input type="radio"/>		<input type="radio"/>		<input type="radio"/>		<input type="radio"/>	
H50/600 Beverage	—		—		—		—		<input type="radio"/>		<input type="radio"/>		—	

DUPLEX MAST (in mm)

Series	1534					
Lift	h3: 2730 ¹⁾		h3: 3130		h3: 3730	
Height measurements	h1: 2170 h4: 3665	h2: 1225	h1: 2380 h4: 4080	h2: 1425	h1: 2680 h4: 4680	h2: 1725
Manufacturer's type designation						
H35/600	<input type="radio"/>		<input type="radio"/>		<input type="radio"/>	
H40/600	<input type="radio"/>		<input type="radio"/>		<input type="radio"/>	

Series	1534					
Lift	h3: 2730 ¹⁾		h3: 3130		h3: 3730	
Height measurements	h1: 2170 h4: 3665	h2: 1225	h1: 2430 h4: 4085	h2: 1475	h1: 2730 h4: 4685	h2: 1775
Manufacturer's type designation						
H45/600	<input type="radio"/>		<input type="radio"/>		<input type="radio"/>	

Series	1534			
Lift	h3: 2530 ¹⁾		h3: 2930	
Height measurements	h1: 2170 h4: 3565	h2: 1125	h1: 2430 h4: 3980	h2: 1375
Manufacturer's type designation				
H50/500	<input type="radio"/>		<input type="radio"/>	
H50/600	<input type="radio"/>		<input type="radio"/>	
H50/600 Beverage	—		—	

TRIPLEX MAST (in mm)

Series	1534							
Lift	h3: 4075 ¹⁾		h3: 4675		h3: 5365		h3: 6315	
Height measurements	h1: 2170 h4: 5010	h2: 122	h1: 2380 h4: 5625	h2: 142	h1: 2630 h4: 6315	h2: 167	h1: 2980 h4: 7265	h2: 202
Manufacturer's type designation								
H35/600	<input type="radio"/>		<input type="radio"/>		<input type="radio"/>		<input type="radio"/>	
H40/600	<input type="radio"/>		<input type="radio"/>		<input type="radio"/>		<input type="radio"/>	

Series	1534							
Lift	h3: 4075 ¹⁾		h3: 4675		h3: 5365		h3: 6315	
Height measurements	h1: 2170 h4: 5010	h2: 122	h1: 2430 h4: 5630	h2: 147	h1: 2680 h4: 6320	h2: 172	h1: 3030 h4: 7270	h2: 207
Manufacturer's type designation								
H45/600	<input type="radio"/>		<input type="radio"/>		<input type="radio"/>		<input type="radio"/>	

Series	1534									
Lift	h3: 3775 ¹⁾		h3: 4375		h3: 4615		h3: 5565		h3: 6015	
Height measurements	h1: 2170 h4: 4810	h2: 112	h1: 2430 h4: 5425	h2: 137	h1: 2530 h4: 5665	h2: 147	h1: 2880 h4: 6615	h2: 182	h1: 3030 h4: 7065	h2: 197
Manufacturer's type designation										
H50/500	<input type="radio"/>		<input type="radio"/>		<input type="radio"/>		<input type="radio"/>		<input type="radio"/>	
H50/600	<input type="radio"/>		<input type="radio"/>		<input type="radio"/>		<input type="radio"/>		<input type="radio"/>	
H50/600 Beverage	—		—		—		<input type="radio"/>		<input type="radio"/>	

1) Container version

Optional equipment

— Not available

h1: Height of mast, lowered


h2: Free lift

h3: Lift

h4: Height of mast, extended


LOAD CAPACITY

H35/600




H (mm)	Q (kg)			
7000	2400	2200	2030	1880
6900	2520	2310	2130	1980
6800	2640	2420	2230	2070
6700	2760	2530	2340	2170
6600	2880	2640	2440	2260
6500	3010	2760	2540	2360
6400	3130	2870	2650	2460
6300	3250	2980	2750	2550
6200	3370	3090	2850	2650
≤ 6100	3500	3200	2960	2750
c (mm)	400-600	700	800	900

H40/600




H (mm)	Q (kg)			
7000	2400	2200	2030	1880
6800	2660	2440	2250	2090
6700	2800	2560	2370	2200
6600	2930	2690	2480	2300
6500	3060	2810	2590	2410
6400	3200	2930	2710	2510
6300	3330	3050	2820	2620
6200	3460	3180	2930	2720
6100	3600	3300	3050	2830
6000	3730	3420	3160	2930
5900	3860	3540	3270	3040
≤ 5800	4000	3660	3380	3140
c (mm)	400-600	700	800	900

H45/600




H (mm)	Q (kg)			
7000	2500	2290	2120	1970
6800	2830	2600	2400	2240
6700	3000	2750	2550	2370
6600	3160	2910	2690	2500
6500	3330	3060	2830	2630
6400	3500	3210	2970	2760
6300	3660	3360	3110	2900
6200	3830	3520	3250	3030
6100	4000	3670	3400	3160
6000	4160	3820	3540	3290
5900	4330	3980	3680	3420
≤ 5800	4500	4130	3820	3550
c (mm)	400-600	700	800	900

H50/500



H (mm)	Q (kg)			
7000	2800	2550	2340	2170
6800	3160	2880	2650	2450
6700	3350	3050	2800	2590
6600	3530	3220	2960	2730
6500	3710	3380	3110	2880
6400	3900	3550	3260	3020
6300	4080	3720	3420	3160
6200	4260	3890	3570	3300
6100	4450	4050	3720	3450
6000	4630	4220	3880	3590
5900	4810	4390	4030	3730
≤ 5800	5000	4550	4190	3870
c (mm)	400-500	600	700	800

H50/600



H (mm)	Q (kg)			
7000	2800	2570	2380	2210
6800	3160	2910	2690	2500
6700	3350	3070	2840	2640
6600	3530	3240	3000	2790
6500	3710	3410	3150	2930
6400	3900	3580	3310	3080
6300	4080	3750	3470	3220
6200	4260	3920	3620	3370
6100	4450	4080	3780	3510
6000	4630	4250	3930	3660
5900	4810	4420	4090	3800
≤ 5800	5000	4590	4250	3950
c (mm)	400-600	700	800	900

H = Lifting height, c = Load centre, Q = Load capacity
Load capacity for standard mast and fork carriage

STANDARD AND OPTIONAL EQUIPMENT

Manufacturer's type designation/equipment		H35 D - H50 D	H35 T - H50 T	H35 CNG - H50 CNG
Workplace	Ergonomic and safe truck access thanks to low entry step and grab handles on A-pillar and engine cover	●	●	●
	Innovative decoupling concept to minimise human vibrations	●	●	●
	Adjustable steering column tilt	●	●	●
	Overhead guard for optimum head clearance	●	●	●
	Operator's seat - mechanical quick weight adjustment	●	●	●
	Range of seating options, such as heating, air suspension, active seat ventilation, longitudinal suspension	○	○	○
	Operator's seat - swivelling seat	○	○	○
	Colour 3.5" LED display with steering angle and tilt angle indicator	●	●	●
	Colour 7" LED multifunction display integrates additional functions, e.g. cameras and Linde Safety Pilot	○	○	○
	Top screen armoured glass	○	○	○
	Alloy doors with sliding window	○	○	○
	Illuminated DIN A4 clipboard	○	○	○
	Warm water heater incl. demist function/air conditioning	○	○	○
	DAB+ radio with MP3 connection and Bluetooth 'hands-free' support	○	○	○
Drive and brake system	Linde Hydrostatic Drive - for high productivity and low fuel consumption	●	●	●
	Powerful Hyundai 4-cylinder industrial diesel engine, stage V certified (EU version)	●	—	—
	Powerful Hyundai 4-cylinder industrial CNG engine, stage V certified (EU version)	—	—	●
	Powerful Hyundai 4-cylinder industrial LPG engine, stage V certified (EU version)	—	●	—
	Twin LPG bottles with ergonomic, low mounted bottle exchange	—	●	●
	LPG tank including fill level indicator in the display	—	○	—
	Engine air filter including safety elements	●	●	●
	Linde Engine Protection System (LEPS) - visual warning and speed reduction under critical engine conditions	●	●	●
	Hydraulic parking brake	●	●	●
	Oversized, variable displacement pump for lifting function - reduces fuel consumption, noise and emission levels	●	●	●
	Advanced hydraulic filter concept - enabling 6000 hour hydraulic oil change interval	●	●	●
Power settings: efficiency, economy, performance	●	●	●	
Axles and tyres	Super-elastic (SE) tyres	●	●	●
	Closed-shoulder tyres CS 20	○	○	○
	Pneumatic tyres	○	○	○
	Antistatic, non-marking tyres	○	○	○
	Anti-spray mudflaps, front and rear	○	○	○
Mast	High mounted tilting cylinders including maintenance-free bearings	●	●	●
	Optimum visibility through asymmetric, nested mast profiles on standard, duplex, triplex masts	●	●	●
	Electronically damped tilt stop	●	●	●
	Hydraulic accumulator cushions the load over rough ground	○	○	○
Attachment/ forks	Reinforced Linde forks - easy to adjust and long service life	○	○	○
	Integrated sideshift with full lift capacity and roller guided	○	○	○
	Integrated 'View' fork positioner for high residual capacities and optimised visibility	○	○	○
	Street sweeper preparation	○	○	○
Safety	Linde Curve Assist - automatic speed reduction when cornering	●	●	●
	Electric seat belt monitoring - visual and acoustic feedback	●	●	●
	Linde Load Assist - increased safety at high lift heights	●	●	●
	BlueSpot and TruckSpot - optical warning signal for pedestrians and other operators	○	○	○
	Load weight indicator	○	○	○
	Linde Safety Pilot - load-dependent travel and lifting speed intervention plus additional functions	○	○	○
	Linde Safety Guard - truck-to-truck and truck-to-pedestrian warning	○	○	○
	Speed limitations (via switch, indoor-outdoor, load depending)	○	○	○
Restraint systems (different options)	○	○	○	
Digitalisation	Data transmission online	●	●	●
	Data transmission Wifi	○	○	○
	Linde connect:desk - local fleet management with different functional modules	○	○	○
	Linde connect:cloud - fleet management as a service (hosted version)	○	○	○
	Pre-operation check - customisable daily check protocol to check operational readiness	○	○	○
Operation/ load handling	Linde Truck Call App - coordination of transport orders	○	○	○
	Twin pedal control - stepless acceleration and fast reversing	●	●	●
	Single pedal control - stepless acceleration, matches other trucks	○	○	○
	Linde Load Control - central levers fully integrated into armrest for precise control of all hydraulic functions	●	●	●
Individual lever system integrates seamlessly into mixed fleets	○	○	○	

● Standard equipment ○ Optional equipment — Not available

CHARACTERISTICS



All-round visibility

Safety

- Optimised design provides excellent visibility in all directions
- Roof with narrow crossbars and optional bulletproof glass roof panel simplifies work at high lift heights
- Low load centre and a high mounted steering axle improve truck stability in curves
- Linde Curve Assist and Linde Load Assist reduce the risk of tipping and accidents during loading



Operator workplace

Ergonomics

- Ergonomic and intuitive operating concept maximises forklift operator comfort
- Components decoupled from chassis (axles, mast and tilt cylinder) protect against shocks and vibrations
- Wide range of ergonomic seats prevent posture problems
- 3.5-inch display shows steering and tilt angles as standard and provides a constant overview of all important information



Linde Load Control

Handling

- Linde Load Control and twin pedal control guarantee precise control of all travel and mast movements
- High-mounted tilt cylinders guarantee torsional rigidity and high residual capacity at high lift heights
- Low fuel consumption reduces operating costs
- Freely programmable buttons in the armrest ensure access to frequently used functions



Easy service access

Service

- Robust design with low-wear and maintenance-free components ensures high availability
- Linde Engine Protection System (LEPS) provides additional protection against engine damage
- Extra-large service openings facilitate maintenance
- Standardised bolted connections save considerable time during maintenance and repairs

Presented by:

Subject to modification in the interest of progress. Illustrations and technical specifications could include options and are not binding for actual constructions. All dimensions subject to usual tolerances.



Linde Material Handling GmbH
Carl-von-Linde-Platz | 63743 Aschaffenburg | Germany
Phone + 49 6021 99 0 | Fax + 49 6021 99 1570
www.linde-mh.com | info@linde-mh.com

DS_H35-H50_1204_en_B_0724

